

# G25

## MULTIBOWL WELLHEAD DRILL-THRU SYSTEM (DTS)

The G25 DTS saves you time by facilitating drilling, running and cementing intermediate and production casing and eliminating the need to break the BOP Stack and install an intermediate casing spool. Immediately resume drilling of the production string and complete with standard casing slips. It is available in flange sizes 11" 5000 PSI.


Contact Great North Wellhead & Frac to inquire about additional sizes and configurations.

### Features

- True-bore access of 6.276" with mandrel casing hanger installed.
- Working pressure of 5000 PSI.
- **Drill-thru head bottom connection** 11" 5M studded down R-54 RTJ.
- **Drill-thru head top connection** 11" 5M flanged R-54 RTJ.
- **Drill-thru head outlets** 2 - 2 1/16 5M studded c/w VRT.
- Overall height of the Drill-Thru head 18 3/4".
- Conforms to API 6A temperature, material and PSL Specifications.

### Options

- 4 1/2" Casing can be suspended with a Mandrel Hanger for Frac Operations.
- Optional Heavy-duty Service Fluted Mandrel Hanger for deep well applications (up to 6000 M TVD).
- Fluted Mandrel Hanger comes standard with LC threads.
- Available in 7" and 7 5/8" LC
- **Premium threads available upon request.**
- The G25 DTS is designed to utilize contingency equipment (supplied) should it not be possible to use the Mandrel Hanger.

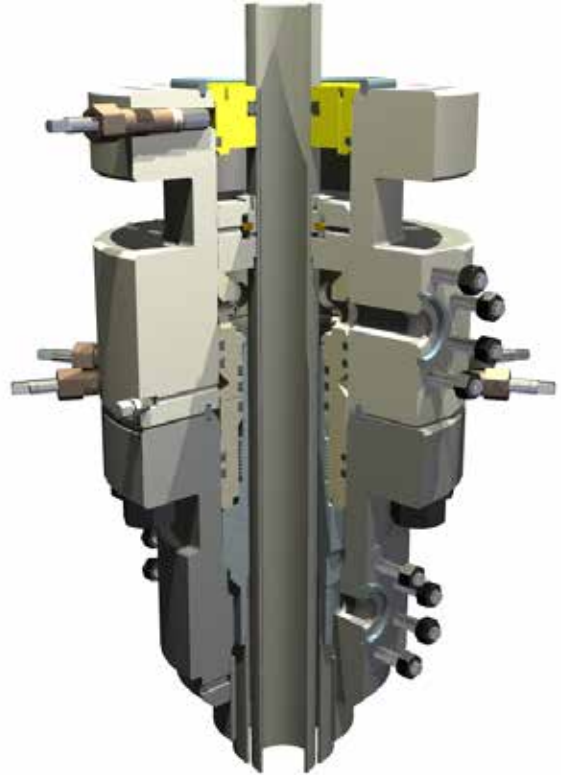

### When Ordering Please Specify

- Casing Program, including casing weights, grades and TVD.
- PSL Requirements.
- Standard or Sour Service.
- Optional equipment as outlined above.

## G25 MULTIBOWL WELLHEAD

UPPER FLANGE Nominal Size (inches)	FLANGE Rated Working Pressure (PSI)	CASING SIZE Bottom (inches)	MINIMUM BORE (B) (inches)	LOWER FLANGE Nominal Size (inches)	FLANGE Rated Working Pressure (PSI)
7 1/16"	2000 - 15 000	4 1/2"	4.0"	7 1/16"	2000 - 10 000
		5 1/2"	5.0"		
		6"	5.45"		
		6 5/8"	6.05"		
		7"	6.44"		
9"	2000 - 10 000	4 1/2"	4.0"	9"	2000 - 10 000
		5 1/2"	5.0"		
		6"	5.45"		
		6 5/8"	6.05"		
		7"	6.44"		
		8 5/8"	8.0"		
11"	2000 - 10 000	7"	6.44"	11"	2000 - 10 000
		8 5/8"	8.0"		
		9 5/8"	9.0"		
		10 3/4"	10.1"		
13 5/8"	2000 - 10 000	7"	6.44"	13 5/8"	2000 - 10 000
		8 5/8"	8.0"		
		9 5/8"	9.0"		
		10 3/4"	10.1"		
		11 3/4"	11.05"		
16 3/4"	2000 - 10 000	11 3/4"	11.05"	16 3/4"	2000 - 10 000
		13 3/8"	12.6"		
		16"	15.25"		
20 3/4"	3000	16"	15.25"	20 3/4"	3000
		18 5/8"	17.6"		
		20"	19"		
21 1/4"	2000, 5000, 10 000	16"	15.25"	21 1/4"	2000, 5000, 10 000
		18 5/8"	17.6"		
		20"	19"		

# G25 STACK UP

